


**FP**

**980 - 1050 °C**

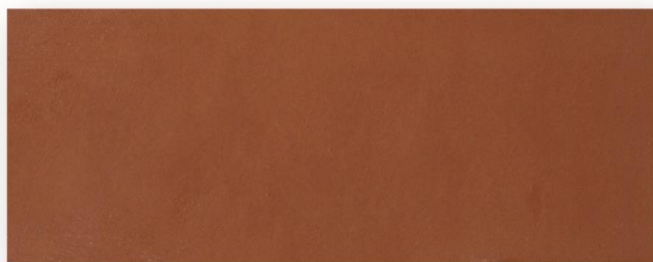

Ferruginous paste. Excellent drying behavior with glazes and underglazes (slipware). Intended for artistic, decorative, and tableware ceramics works. High plasticity, shapable and easy to work with... Ideal for turning, pressing and molding.

*Technical data sheet*

Drying		Firing			
Humidity	Shrinkage	°C	l. weight	Water Absorption	Contracción
22%	5,50%	950°C	8,60%	12,79%	0,20%
19%	3,50%	1000°C		12,76%	0,44%
		1050°C		10,25%	0,55%

*Thermal coefficient*

64.62x10<sup>-7</sup>°C<sup>-1</sup> (48.1-500°C)